


TX-121000 & TX-241000 & TX-331000 AV Wireless Transmitter Module

- Video/Audio Wireless Transmitter Module
- RF output power 1000mW / +30dBm
- Highly integrated circuit
- Digital Phase-Lock-Loop circuit
- 8 channels DIP switch selectable
- Copper-Nickel-Zinc Alloy case
- Ceramic heat spreaders



Model Name	TX-121000	TX-241000	TX-331000
Frequency Band	1200MHz	2400MHz	3300MHz
Available Channel	8 Ch	8 Ch	8 Ch
Audio Subcarrier	5.5MHz	6.5MHz	6.5MHz
Operating Voltage	DC12V		
Operating Current	≤ 350mA		
Trans. Range	200m (Open space)		
Transmission Power	30 ± 1 dBm		
Power Consumption	≤ 4.2W		
Operating Temperature	0~60°		
Operating Humidity	20~90%		
Channel Selection	Dip Switch		
Antenna Connector	SMA Connector		
Frequency Lock Method	Digital Phase Lock Loop		
Weight	27 ± 1g		
Dimension	59.8*25*11.3 mm (L*W*H)		

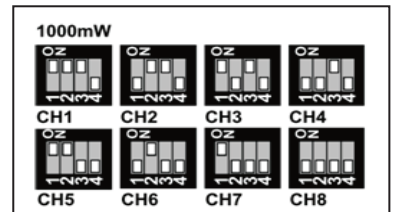

item	TX-121000 (A)	TX-241000 (A)	TX-331000(A) (A)	TX-331000(B) (B)
CH 1	1080	2410	3330	3250
CH 2	1120	2430	3350	3270
CH 3	1160	2450	3370	3290
CH 4	1200	2470	3390	3310
CH 5	1010	2370	3410	3490
CH 6	1040	2390	3430	3510
CH 7	1240	2490	3450	3530
CH 8	1280	2510	3470	3550

Absovision reserves the right, without liability or prior notice, to revise or discontinue certain items



AUDIO & VIDEO DESIGN SOLUTION