



# TX-120015 & TX-240015 & TX-330015 AV Wireless Transmitter Module

- Video/Audio Wireless Transmitter Module
- Compact size module
- Highly integrated circuit
- 8 channels DIP switch selectable
- 500/1000 mW output power instant switchable
- Digital Phase-Lock-Loop circuit without temperature drifting problem
- Light aluminum case total weight only 17 gram

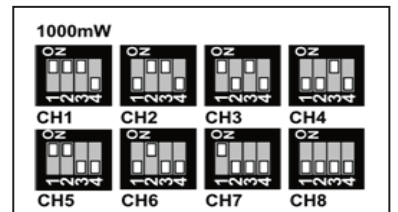

Model Name	TX-120015	TX-240045	TX-330015
Frequency Band	1200MHz	2400MHz	3300MHz
Available Channel	8 Ch	8 Ch	8 Ch
Audio Subcarrier	5.5MHz	6.5MHz	6.5MHz
Operating Voltage	DC12V		
Operating Current	300~350mA		
Trans. Range	0.5W: 120m / 1W: 200m (Open space)		
Transmission Power	0.5W: 27±0.5 dBm / 1W: 30±1 dBm		
Power Consumption	3.6W		
Operating Temperature	0~60°		
Operating Humidity	20~80%		
Channel Selection	Dip Switch		
Antenna Connector	SMA Connector		
Frequency Lock Method	Digital Phase Lock Loop		
Weight	17 ± 1g		
Dimension	37.5*27*12.6 mm (L*W*H)		

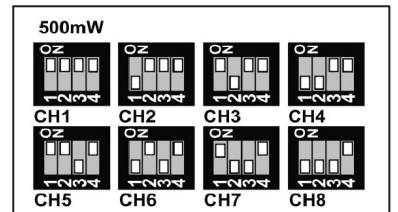

item	TX-120015 (A)	TX-240015 (A)	TX-330015(A) (A)	TX-330015(B) (B)
CH 1	1080	2410	3330	3250
CH 2	1120	2430	3350	3270
CH 3	1160	2450	3370	3290
CH 4	1200	2470	3390	3310
CH 5	1010	2370	3410	3490
CH 6	1040	2390	3430	3510
CH 7	1240	2490	3450	3530
CH 8	1280	2510	3470	3550

Absovision reserves the right, without liability or prior notice, to revise or discontinue certain items

