


TX-120500 & TX-240500

AV Wireless Transmitter Module

- Video/Audio Wireless Transmitter Module
- RF output power 500mW / +27dBm
- Highly integrated circuit
- Digital Phase-Lock-Loop circuit
- 8 channels DIP switch selectable
- Copper-Nickel-Zinc Alloy case



Model Name	TX-120500	TX-240500
Frequency Band	1200MHz	2400MHz
Available Channel	8 Ch	8 Ch
Audio Subcarrier	5.5MHz	6.5MHz
Operating Voltage	DC5V	
Operating Current	≅ 500mA	
Trans. Range	120m (Open space)	
Transmission Power	27 ± 1 dBm	
Power Consumption	≤ 2.5W	
Operating Temperature	0~60°	
Operating Humidity	20~90%	
Channel Selection	Dip Switch	
Antenna Connector	SMA Connector	
Frequency Lock Method	Digital Phase Lock Loop	
Weight	10 ± 1g	
Dimension	30*22.5*6.8 mm (L*W*H)	

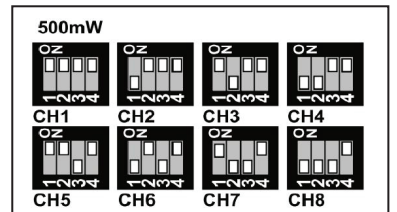

item	TX-120500	TX-240500
	(A)	(A)
CH 1	1080	2410
CH 2	1120	2430
CH 3	1160	2450
CH 4	1200	2470
CH 5	1010	2370
CH 6	1040	2390
CH 7	1240	2490
CH 8	1280	2510

Absovision reserves the right, without liability or prior notice, to revise or discontinue certain items

